






# 3 Wheel Combination Safe Lock Instructions

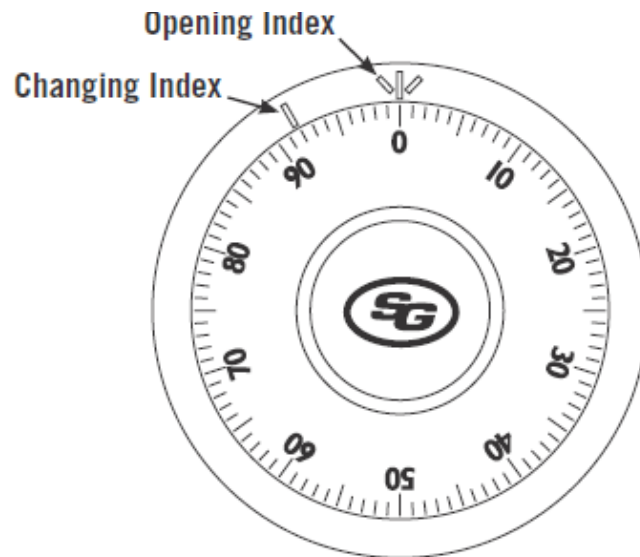

1 <sup>st</sup> Number	<input type="text"/>	 <b>TURN LEFT</b>	Stopping when the number comes to the mark for the 4 <sup>th</sup> time.
2 <sup>nd</sup> Number	<input type="text"/>	 <b>TURN RIGHT</b>	Stopping when the number comes to the mark for the 3 <sup>rd</sup> time.
3 <sup>rd</sup> Number	<input type="text"/>	 <b>TURN LEFT</b>	Stopping when the number comes to the mark for the 2 <sup>nd</sup> time.
		 <b>TURN RIGHT</b>	Slowly until the dial stops and the bolt is retracted.

- The lock should now be unlocked and you can operate the safe handle (if applicable) and pull the door open.
- To lock the safe turn the handle back to the original position and turn the dial left at least four complete turns.

# Combination Changing Procedure

\*Please read these instructions carefully before starting the process.

1. Locate the change key.
2. Dial the existing combination to the change mark. Leave the 3<sup>rd</sup> number of the combination parked on the mark.
3. Insert the change key into the back of the lock body and turn as shown.
4. Dial the new combination to the change mark using the correct sequence of turns and taking care to be accurate.
5. Leave the 3<sup>rd</sup> number parked on the change mark. Turn the change key back to the original position and remove from lock.
6. Test the combination by using the new numbers and the correct dialing sequence at least three times before locking the safe door.

